



Panasonic
CINEMA

VariCam LUT Library

Applying .VLT LUTs to SDI Out

Note: VF-SDI cannot have a Grading LUT applied if Surround View is ON. In this condition, VF-SDI can select V-LOG or V-709. To see a graded LUT in the VF, turn off Surround View in the VF-SDI OUT settings.

MENU > OUTPUT SETTINGS > VF SDI OUT	
EXIT	
VF SDI OUT FORMAT	59.94p
3G-SDI OUT	LEVEL-B
VF SDI CLEAN VIEW	OFF
SURROUND VIEW SW	OFF
SURROUND VIEW AREA	UPPER(NORMAL)


Copy VariCam LUT files (.VLT) to root directory of a camera formatted SD Card
Note: Do not put the files in a folder, they must be in the root directory as shown.


Camera formatted SD Card



.VLT files in
Root Directory,
not in a folder!

Mount SD in camera once .VLT files are copied

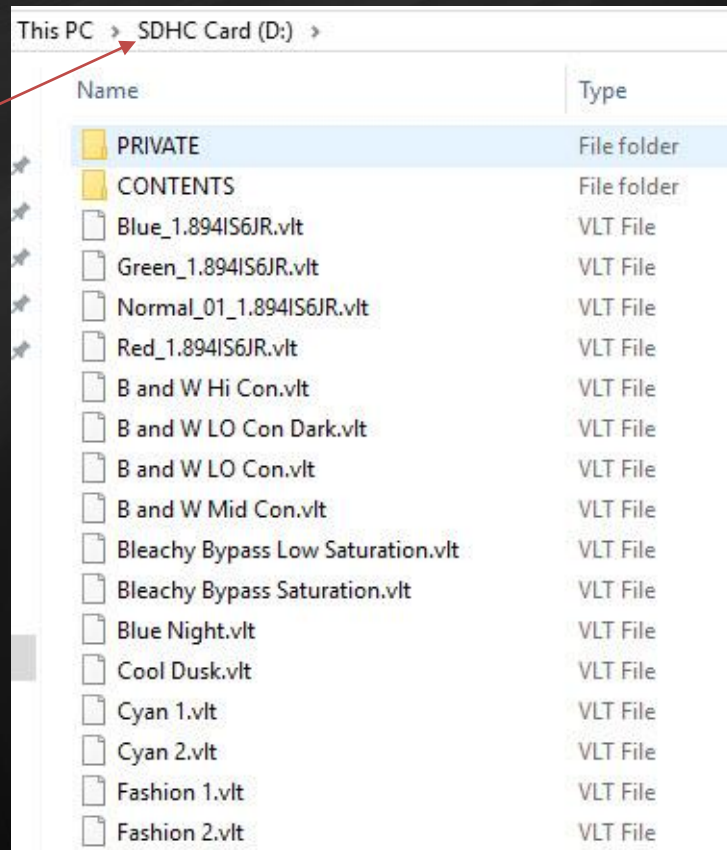


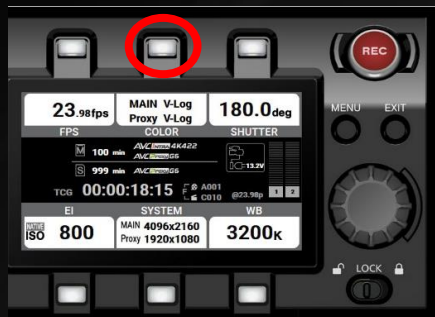

1. Press Color Button



2. Press Grading SEL
Use dial and select Internal,
Press Dial to confirm

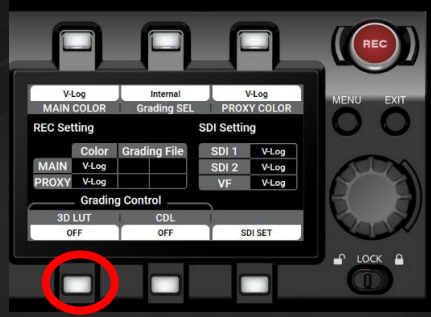


3. Press 3D LUT Button




4. Select LOADED FILE using
the dial




5. Select 3D LUT again and
Press LOAD and then
select from list on SD Card.
Press Dial to load selection.

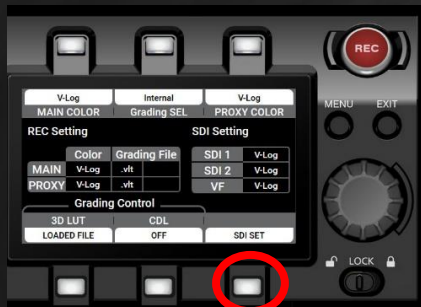

6. Press SET SDI to view the
Selected LUT on the SDI OUT
of choice

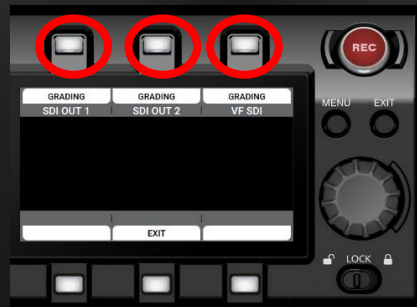

7. Press SDI OUT to choose
which outputs will see the
applied LUT. LUT Choices are
V-LOG or GRADING

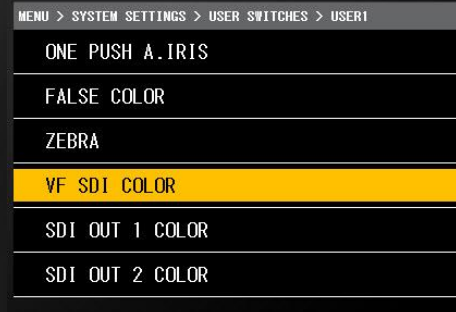

8. To switch fast between
V-LOG and Grading, assign a
User switch to VF-SDI OUT
COLOR or SDI OUT COLOR